


INSTALLATION

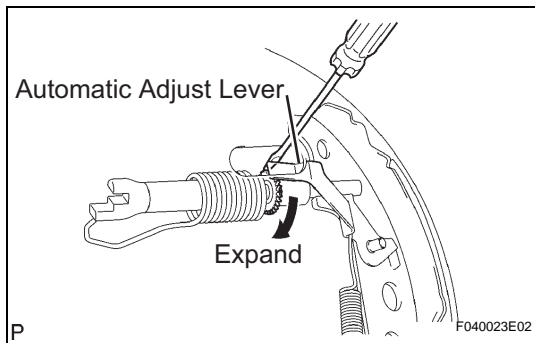

1. **INSTALL REAR BRAKE DRUM SUB-ASSEMBLY**
 - (a) Install a new drum gasket onto the rear brake drum.
 - (b) Install the rear brake drum.
2. **ADJUST REAR DRUM BRAKE SHOE CLEARANCE**
 - (a) Provisionally install the hub nuts.
 - (b) Remove the hole plug, and turn the adjuster to expand the shoe until the drum locks.
 - (c) Using a screwdriver, release the adjuster 15 notches.
 - (d) Install the hole plug.
3. **FILL RESERVOIR WITH BRAKE FLUID (w/ VSC) (See page BR-4)**
4. **FILL RESERVOIR WITH BRAKE FLUID (w/o VSC) (See page BR-7)**
5. **BLEED MASTER CYLINDER (w/o VSC) (See page BR-7)**
6. **BLEED BRAKE LINE (w/ VSC) (See page BR-4)**
7. **BLEED BRAKE LINE (w/o VSC) (See page BR-7)**
8. **CHECK FLUID LEVEL IN RESERVOIR (w/ VSC) (See page BR-6)**
9. **CHECK FLUID LEVEL IN RESERVOIR (w/o VSC) (See page BR-8)**
10. **CHECK FOR BRAKE FLUID LEAKAGE**
11. **INSTALL REAR WHEEL**
Torque: 113 N*m (1,152 kgf*cm, 83 ft.*lbf)
12. **INSPECT PARKING BRAKE PEDAL TRAVEL (for Automatic Transmission) (See page PB-1)**
13. **INSPECT PARKING BRAKE LEVER TRAVEL (for Manual Transmission) (See page PB-1)**
14. **ADJUST PARKING BRAKE PEDAL TRAVEL (for Automatic Transmission) (See page PB-2)**
15. **ADJUST PARKING BRAKE LEVER TRAVEL (for Manual Transmission) (See page PB-2)**